


RS SERIES

RS Reflect 403 3%

SG RS REFLECT
STYLES


RS Reflect 403 3%

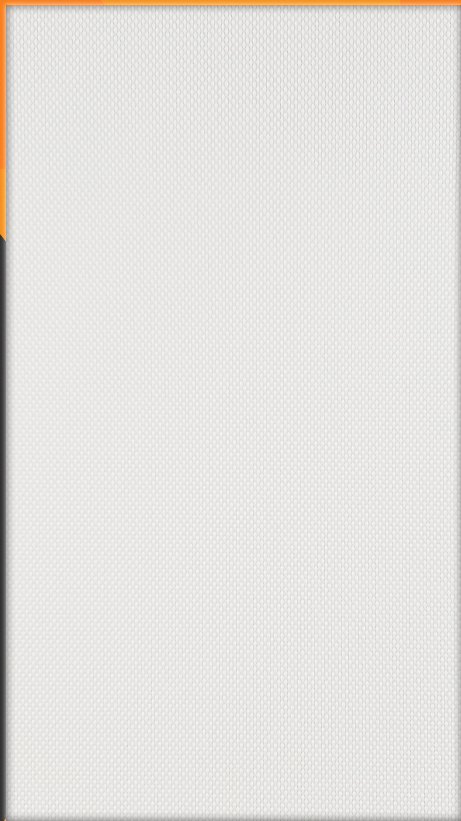


RS REFLECT 403 3% – BRIGHT WHITE




RS REFLECT 403 3% – BEIGE/WHITE

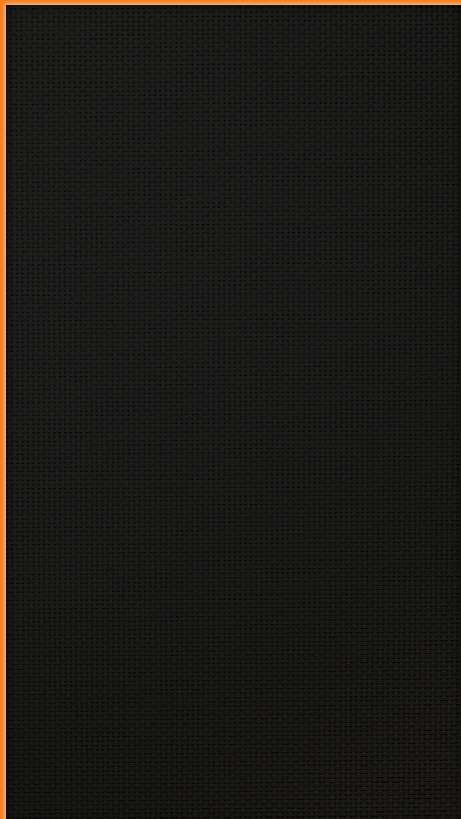

RS REFLECT 403 3% – BLACK

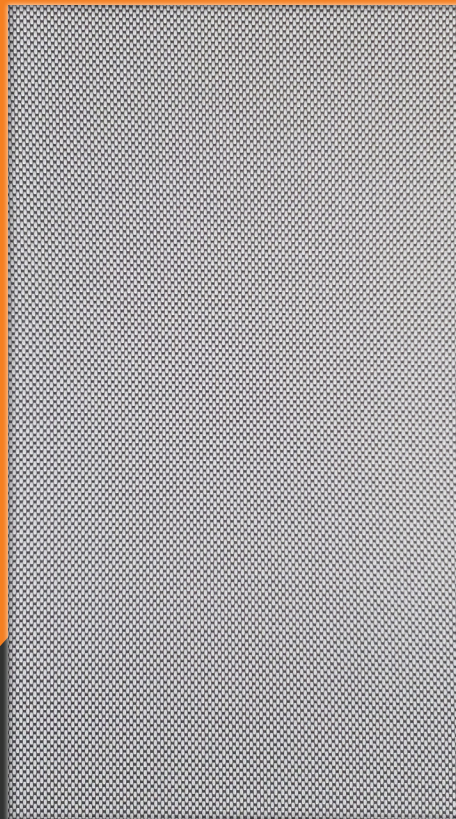

RS REFLECT 403 3% – GREY/WHITE





Sun Glow Window Covering Products of Canada Ltd.

www.mysunglow.com | (416) 266-3501 | 1 (800) 668-1728
 50 Hollinger Road, Toronto, Ontario M4B 3G5

SG RS REFLECT
STYLES

RS Reflect 403 3%

TECHNICAL SPECIFICATIONS			
width	weight	thickness	composition

SG RS Reflect 403 3%



118" 300cm	12.87oz/yd ² ±5% 470g/m ² ±5%	0.025" 0.65mm	30% Polyester, 70% PVC
---------------	--	------------------	------------------------

Certifications: Greenguard, Greenguard Gold,
 OEKO TEX STANDARD 100, NFPA701, ASTM G-21&E-2180

SOLAR VALUES				
fabric & colour	Ts	Rs	As	SHGC

SG RS Reflect 403 3%

RS 403 Reflect White	6	74	20	0.22
RS 403 Reflect White/Beige	6	73	21	0.23
RS 403 Reflect White Grey	6	73	21	0.23
RS 403 Reflect Black	5	72	23	0.24

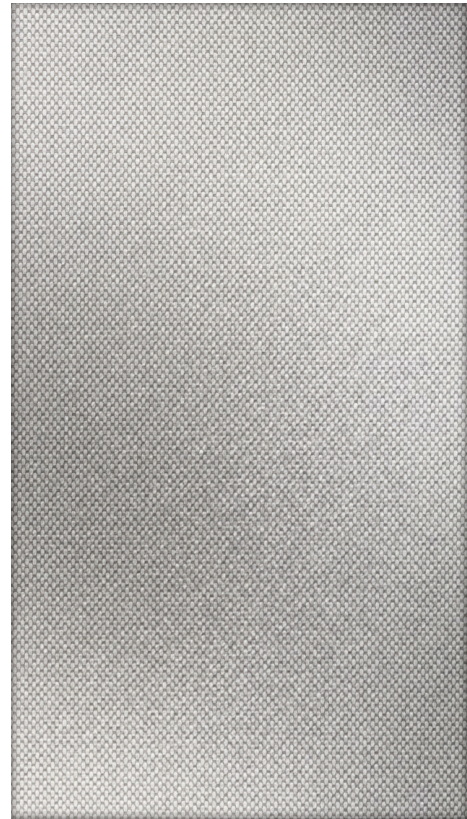

Thermal Efficiency

When sunlight hits a window some of the solar energy is transmitted through (Solar Transmittance **T%**), some is reflected back (Solar Reflectance **R%**) and some is absorbed by the glass and sun screen (Solar Absorption **A%**). Some of the absorbed heat will allow into the building.

Visual Transmittance (T%)

The percentage of total visible solar energy passing through a sun control fabric. The higher the number, the more visible light will penetrate into the interior, the greater the glare.

Visibility

Darker colours have a lower T% value, and a higher A% value, providing better outward visibility.