

# Panel Track

---






# Panel Track

## Features and Specifications

### Control and Opening Location

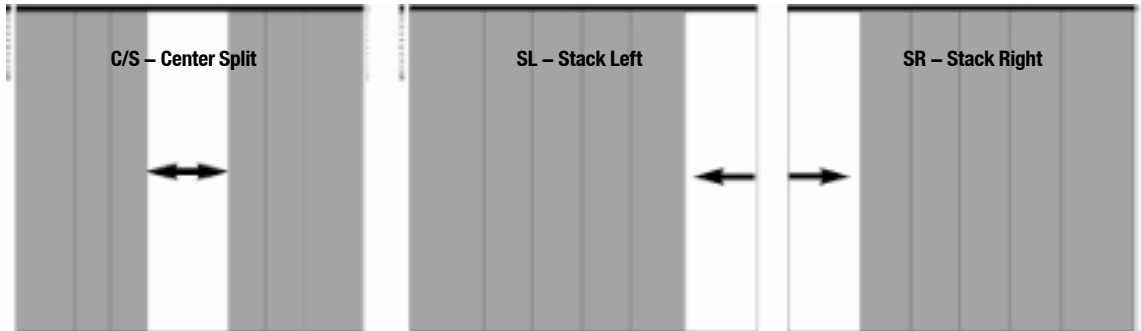

Note: 5 Channel Track is required for all centre split applications.

### Panel Sizing

#### Panel Width Calculation

Panels overlap by approximately 2". The minimum panel width is 16" and the maximum panel width is 48". To determine the approximate width of each panel, divide the total width of the panel track system by the number of panels and add the following:

1" for 3 panels	1 1/2" for 6 panels
1 1/4" for 4 panels	1 5/8" for 8 panels
1 3/8" for 5 panels	

#### Panel Height Calculation

Sun Glow will deduct 1/2" from the height of the panel track when "tight" measurement is specified on the order form. No deductions are taken on "finished" measurements. When using "finished" measurements, Sun Glow recommends a height deduction of a minimum of 1/2" in order to accommodate uneven floors and ceilings.

### Option: Decorative No Sew Bar



No Sew Bar \$5/ft. (no minimum order quantity). Order Code: RM  
Pricing: \$5/ft. (rounded up to closest foot) x # of panels x # of rows of No Sew Bar.

### Panel Track Pricing Notes


- All Panel Tracks include track, fabric panels, side or centre split, manual control (cord with cord weight or wand), mounting brackets, and choice of bottom bar.
- Please refer to the "Panel Width Calculation" above to determine the approximate width of the panels.
- Prices are for shade only. Applicable motor options and controls must be added to these prices.



# Panel Track

## Features and Specifications


### 3 Channel Track




#### 3 Panels - One Way (Open Right Shown)




### 4 Channel Track





#### 4 Panels - One Way (Open Right Shown)





### 5 Channel Track





#### 5 Panels - One Way (Open Right Shown)





#### 4 Panels - Center Split using 5 channel track



#### 6 Panels - Center Split using 5 channel track



#### 8 Panels - Center Split using 5 channel track



Note: Please contact our technical department for areas requiring more than 8 panels, or other special configurations not shown here



# Panel Track Mounting Details

## Ceiling Mount

	Locked in the Back (Fig. 1)			Locked in the Front (Fig. 2)		
	A	B	C	D	E	F
<b>3 Channel</b>	2 1/32" 52mm	2 3/8" 60mm	11/16" 18mm	2 1/32" 52mm	1 1/4" 32mm	11/16" 18mm
<b>4 Channel</b>	2 3/4" 70mm	2 3/8" 60mm	11/16" 18mm	2 3/4" 70mm	2" 51mm	11/16" 18mm
<b>5 Channel</b>	3 1/2" 87mm	2 3/8" 60mm	11/16" 18mm	3 1/2" 89mm	2 5/8" 67mm	11/16" 18mm

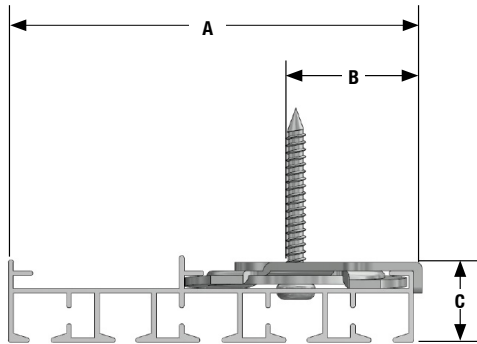


Figure 1

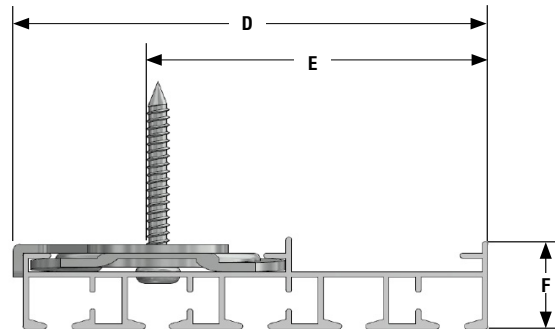


Figure 2

## Wall Mount

	Locked in the Back (Fig. 3)				Locked in the Front (Fig. 4)			
	G	H	I	J	K	L	M	N
<b>3 Channel</b>	2 11/16" 68mm	1 5/8" 41mm	1 13/16" 46mm	3/4" 19mm	3 5/8" 92mm	2" 51mm	2 3/8" 60mm	1.5" 38mm
<b>4 Channel</b>	3 7/16" 87mm	1 5/8" 41mm	1 13/16" 46mm	3/4" 19mm	3 1/2" 89mm	2" 51mm	2 3/8" 60mm	3/4" 19mm
<b>5 Channel</b>	4 1/8" 105mm	1 5/8" 41mm	1 13/16" 46mm	3/4" 19mm	4 1/2" 114mm	2" 51mm	2 3/8" 60mm	1 1/16" 27mm

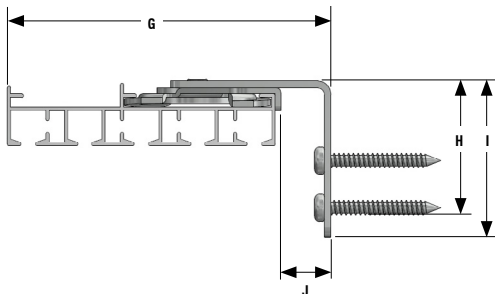


Figure 3


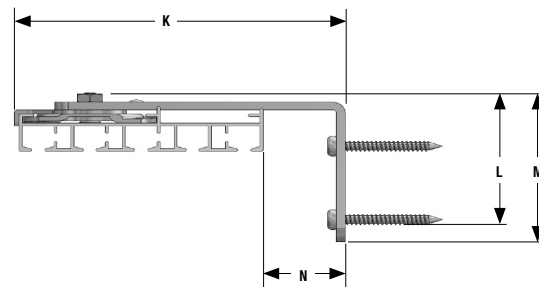


Figure 4




# Panel Track - Manual

## Features & Benefits

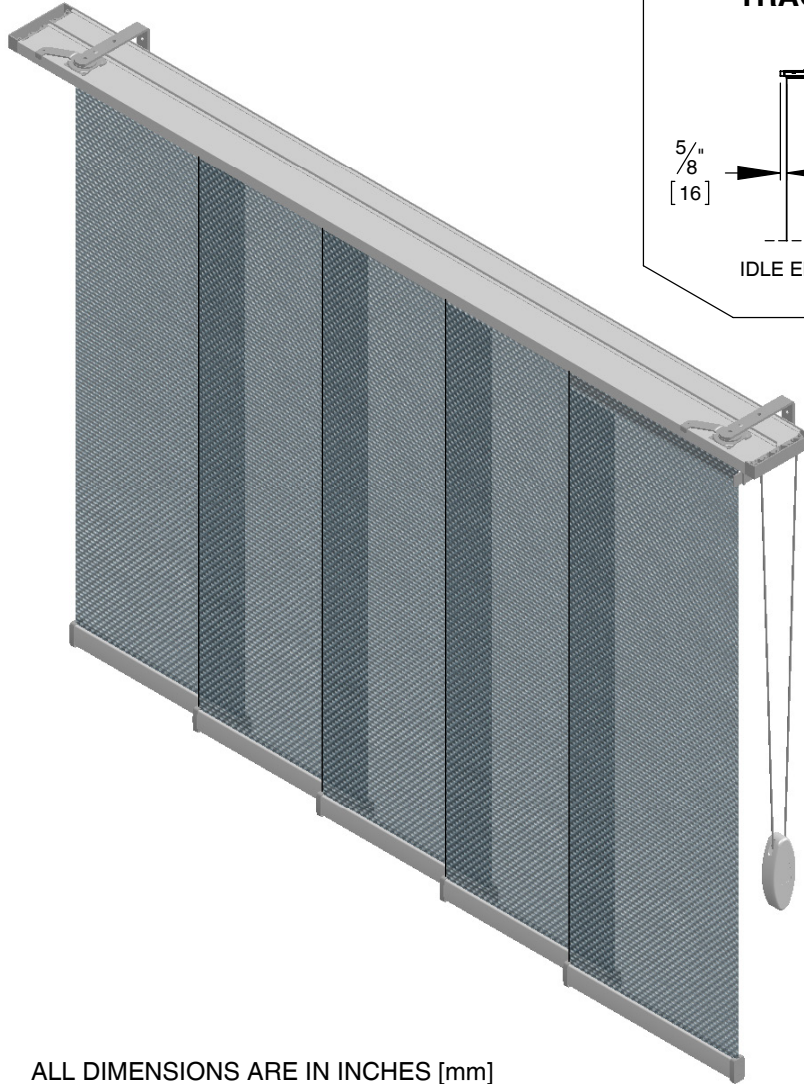

### TRACK EDGE CLEARANCE:

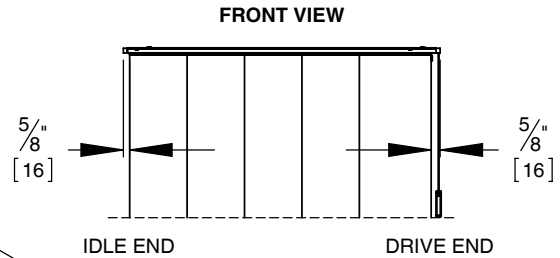

ALL DIMENSIONS ARE IN INCHES [mm]



FEATURES	BENEFITS
CONTEMPORARY DESIGN	IDEAL FOR PATIO DOORS, LARGE WINDOWS, AND ROOM DIVIDERS
LOW PROFILE DESIGN	STREAMLINED TO BLEND INTO THE BUILDING ARCHITECTURE
NYLON COMPONENTS	PROVIDES A SMOOTH OPERATION USING A CORD OR WAND CONTROL
STACKING FLEXIBILITY	AVAILABLE IN CENTER SPLIT AND ONE WAY - WITH LEFT OR RIGHT STACKING
AVAILABLE IN 3, 4, AND 5 CHANNEL TRACKS	PROVIDES MULTIPLE COMBINATIONS
EXTRUDED ALUMINUM TRACK	PROVIDES DURABILITY FOR MANY YEARS
SCALE: NONE	DWG NUMBER: PTSM-01
DATE: OCTOBER 8, 2015	REV: 5
DRAWN BY: M.E.	



# Panel Track - Manual



## Track Options

### 3 - CHANNEL TRACK

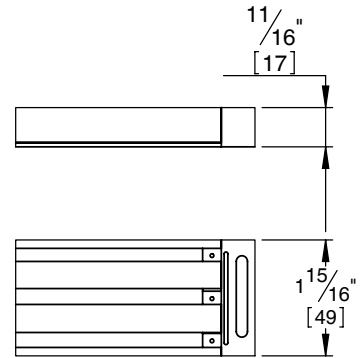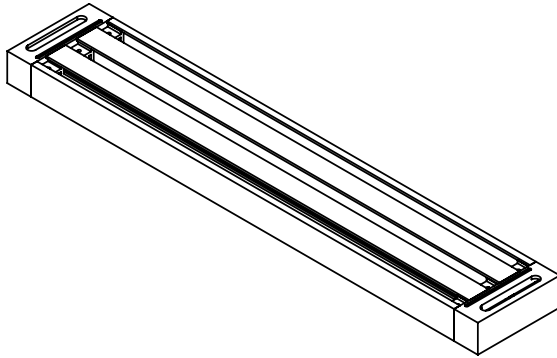


3 - CHANNEL TRACK PROFILE

### 4 - CHANNEL TRACK

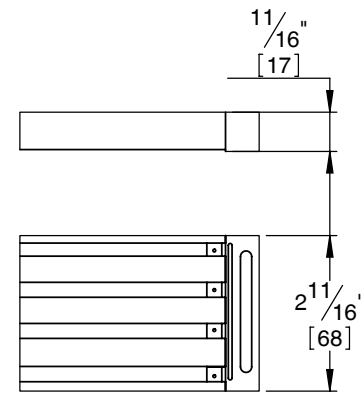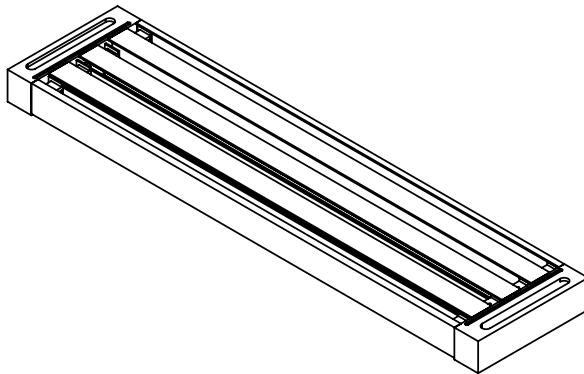


4 - CHANNEL TRACK PROFILE

### 5 - CHANNEL TRACK

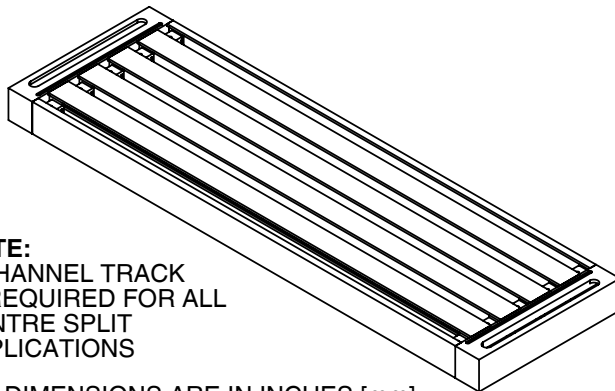

**NOTE:**  
5 CHANNEL TRACK  
IS REQUIRED FOR ALL  
CENTRE SPLIT  
APPLICATIONS

ALL DIMENSIONS ARE IN INCHES [mm]

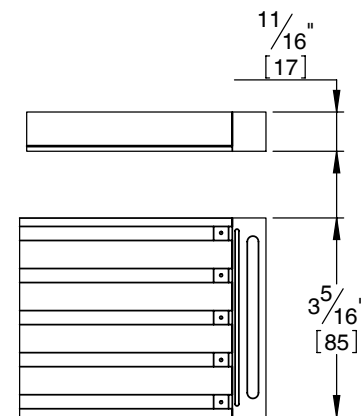


5 - CHANNEL TRACK PROFILE

SCALE:	NONE	DWG NUMBER:	PTD-01	DATE:	SEPTEMBER 16, 2015	REV:	5	DRAWN BY:	M.E.
--------	------	-------------	--------	-------	--------------------	------	---	-----------	------



# Panel Track - Motorized

## Features & Benefits

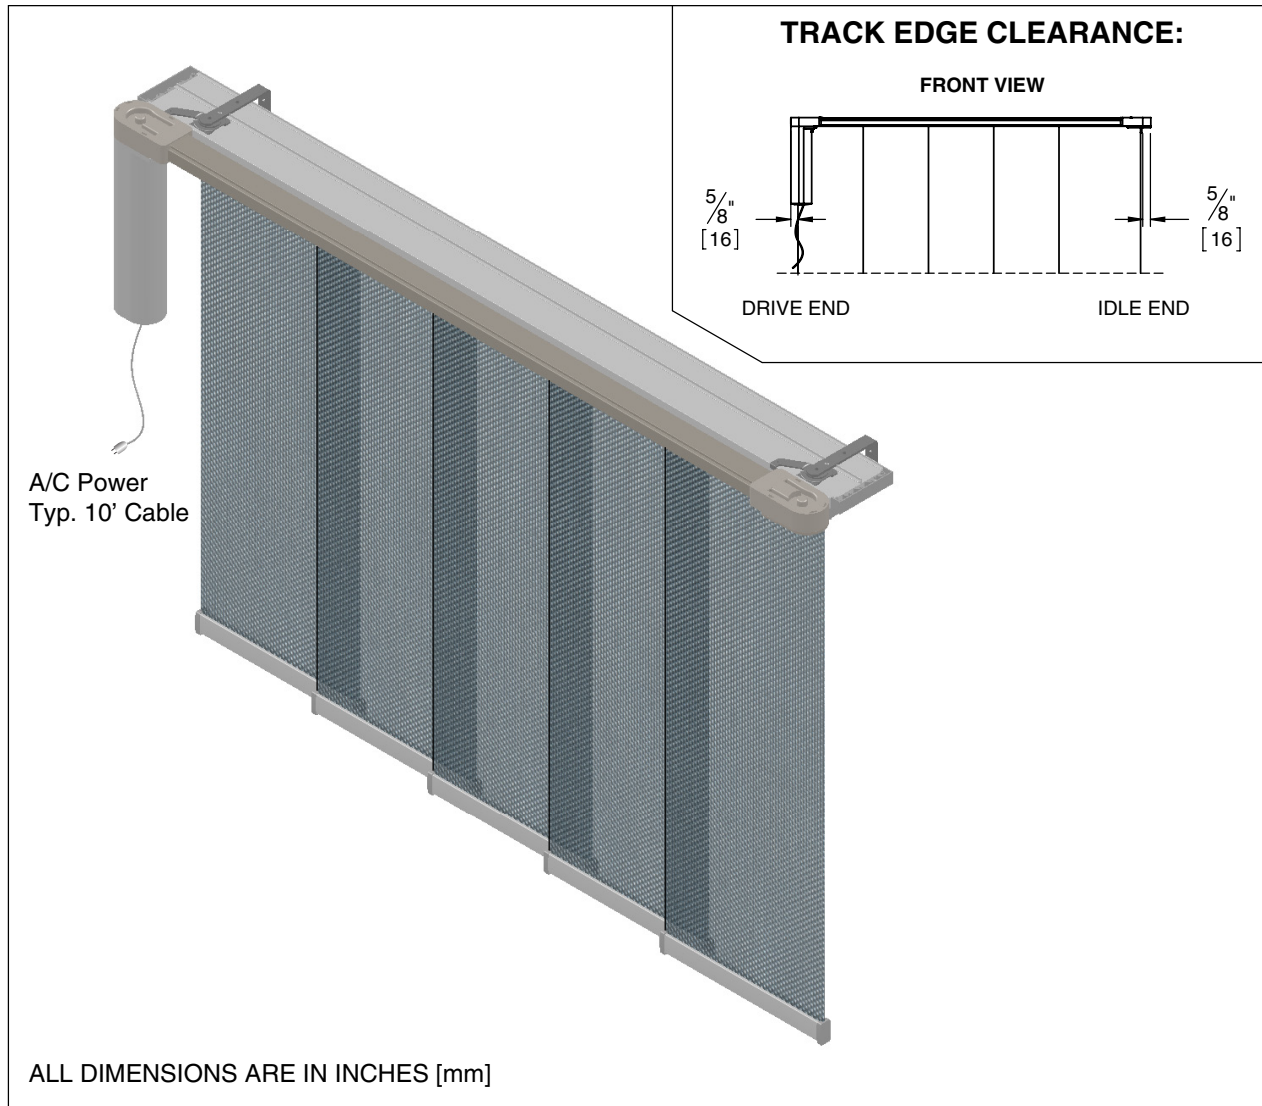

FEATURES		BENEFITS	
CONTEMPORARY DESIGN		IDEAL FOR PATIO DOORS, LARGE WINDOWS, AND ROOM DIVIDERS	
LOW PROFILE DESIGN		STREAMLINED TO BLEND INTO THE BUILDING ARCHITECTURE	
MOTORIZED		<ul style="list-style-type: none"> <li>• USES 110V GLYDEA 35 OR 60e MOTOR TO MOVE TRACK AUTOMATICALLY</li> <li>• <b>TOUCH MOTION</b> ALLOWS USER TO MANUALLY PULL ON THE FABRIC TO ACTIVATE THE PANEL TRACK (AVAILABLE FOR BLYDEA 60e ONLY)</li> </ul>	
STACKING FLEXIBILITY		AVAILABLE IN CENTER SPLIT AND ONE WAY - WITH LEFT OR RIGHT STACKING	
AVAILABLE IN 3, 4, AND 5 CHANNEL TRACKS		PROVIDES MULTIPLE COMBINATIONS	
EXTRUDED ALUMINUM TRACK		PROVIDES DURABILITY FOR MANY YEARS	
SCALE:	NONE	DWG NUMBER:	PTMSM-01
DATE:	SEPTEMBER 16, 2015	REV:	5
DRAWN BY:	M.E.		







# Panel Track - Motorized



## Track Options

### 3 - CHANNEL TRACK

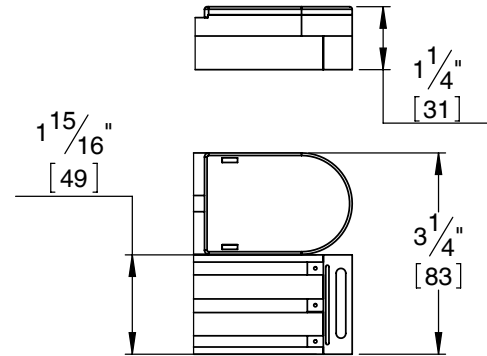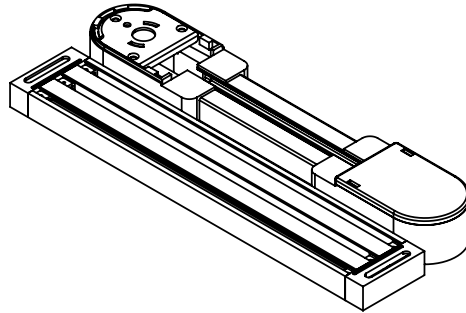


3 - CHANNEL TRACK PROFILE

### 4 - CHANNEL TRACK

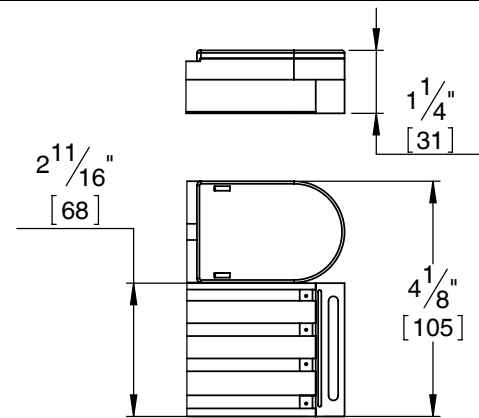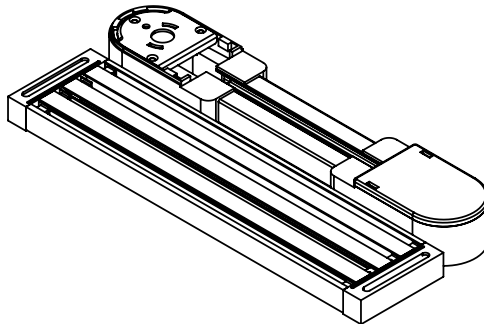


4 - CHANNEL TRACK PROFILE

### 5 - CHANNEL TRACK

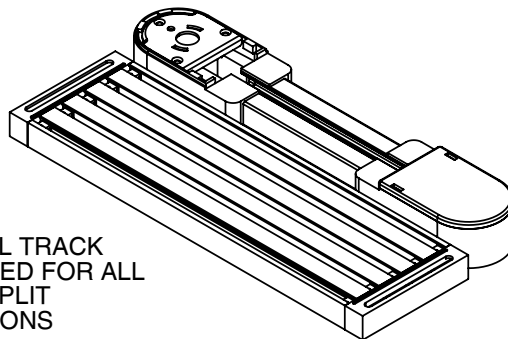

**NOTE:**  
5 CHANNEL TRACK  
IS REQUIRED FOR ALL  
CENTRE SPLIT  
APPLICATIONS

ALL DIMENSIONS ARE IN INCHES [mm]

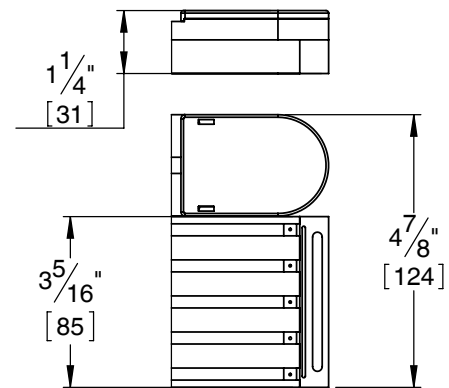

5 - CHANNEL TRACK PROFILE

SCALE:	NONE	DWG NUMBER:	PTMD-01	DATE:	SEPTEMBER 16, 2015	REV:	4	DRAWN BY:	M.E.
--------	------	-------------	---------	-------	--------------------	------	---	-----------	------