

# CS SERIES

PERFORMANCE SUNSCREEN

## SG CS SERIES

STYLES  
 CS 101 1% CS 103 3%  
 CS 105 5% CS 106 5%



# Sales Tools


RS 405 Fiberglass 5%	12.87 oz/yard 470 g/m <sup>2</sup>	0.022" 0.55 mm	30% Fiberglass
118" x 300 cm			

SOLAR VALUES		TS	RS	AS	TV
FABRIC & COLOUR					
RS 403 Fiberglass 3%		20	67	13	17
RS 403 Fiberglass White		18	58	24	14
RS 403 Fiberglass White Beige		13	45	42	11
RS 403 Fiberglass White Grey					
RS 405 Fiberglass 5%		23	64	13	20
RS 405 Fiberglass White		23	53	24	19
RS 405 Fiberglass White Beige		15	42	43	13
RS 405 Fiberglass White Grey					

FABRIC	FR	COLOUR FASTNESS (1-8)	GREEN GUARD CERTIFICATION
RS 403 Fiberglass	NFPA701	SCS 8	Greenguard Gold
RS 405 Fiberglass	NFPA701	SCS 8	Greenguard Gold



**Thermal Efficiency**  
 When sunlight hits a window some of the solar energy is transmitted through (Solar Transmittance T<sub>0</sub>), some is reflected back (Solar Reflectance R<sub>0</sub>) and some is absorbed by the glass and sun-screen (Solar Absorption A<sub>0</sub>). Some of the absorbed heat will allow into the building.

**Visual Transmittance (T<sub>v</sub>)**  
 The percentage of total visible solar energy passing through a sun-screen of fabric. The higher the number, the more visible light will penetrate into the interior, the greater the glare.

**Visibility**  
 Darker colours have a lower T<sub>v</sub> value, and a higher A<sub>0</sub> value, providing better outward visibility.

# DX SERIES

DX 201 1% / DX 203 3%



My Sun Glow Window Covering  
 Products of Canada Ltd.  
 www.mysunglow.com | (416) 266-3501 | (800) 668-1728  
 50 Hollinger Road, Toronto, Ontario M4B 3C5

TECHNICAL SPECIFICATIONS		THICKNESS	COMPOSITION
WIDTH	WEIGHT		
RS 403 Fiberglass 3%		0.024" 0.6 mm	30% Fiberglass + 70% PVC
118"	12.87 oz/yard 470 g/m <sup>2</sup>		
CS 5%			30% Fiberglass + 70% PVC


RS FIBERGLASS SERIES STYLES  
 RS 403 Fiberglass 3%  
 RS 405 Fiberglass 5%



# Sales & Support Tools

Sun Glow offers a wide range of sales tools to assist you in selling our products. Whether you require displays for your showroom or easy to carry portable displays, please see our available options below. All these options are available to be purchased through SG online, go to:

<https://dealerportal.mysunglow.com/>

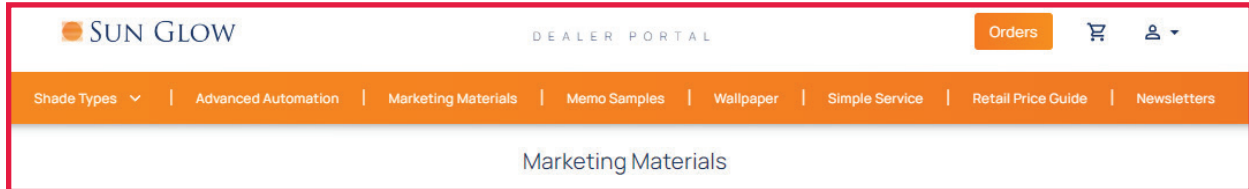

## SG Magazine

The Magazine, heavy in lifestyle photography, was created as an overview of all Sun Glow product lines. It is intended as a give away to your clients or at trade shows. There is a spot on the back for you to attach or stamp your company information.

[Download](#)



## Fabric Catalogue

Compact catalogue contains all Sun Glow fabric offerings in 7" x 9" swatches, with each collection displayed in a waterfall format. The catalogue is divided by fabric category: transparent; translucent; privacy, sustainable, sunscreen; opaque. Dividers summarize all technical information related to each fabric and each fabric label includes critical fabric attributes for easy reference when showing clients. The binder format allows you to easily remove fabrics to display in windows to facilitate client visualization of the end product.



## Interlude and Illusions Fabric Catalogue

The light and easy to carry catalogue, contains fabric cards of both Interlude and Illusions collections divided by specification cards summarizing technical data on each fabric.



## Vision Brochure

One page brochure, double sided print on card stock – highlights all the features of our patented Vision system. Ideal to leave with architects or contractors.

[More Info.](#)

[Download](#)



# Sales Tools




## Wallpaper Display

Sun Glow's Custom only wallpaper display contains several printed wallpaper types including peel and stick, textured, and paste. All specifications are included in an easy to follow selection guide.

[More Info.](#)

[View Video](#)

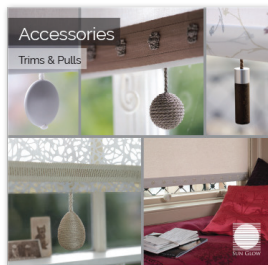

## Accessory Trim Board

The Board unfolds to 3' wide and is a double sided display of actual braid samples coupled with life size photography of accompanying pulls. Makes it simple to match the shade fabrics to the braids.

[View Video](#)



## Tier Display

The tiered display is standard at 36" wide with 3 tiers. Very compact, easy to install display, protruded 8" from the wall. It allows you to display 3 operable shades with very little showroom space. Can be customized in a wider width or to include more tiers – ask for quote.



## Openness Sample

Great way to display the openness in sunscreens and the differences in outward visibility with light and dark fabrics. Our sample includes 1%, 3%, 5% and CS reflect. The sample can be easily attached to a window with the use of suction cups provided.



## Sample Case

Sample case holds 5 operable hand samples. There is also room for a Roman shade or other items you may want to display. It is on Casters and has a pull out handle for easy transport. The case keeps your samples clean and protects them from damage so that are in perfect shape everytime you show them. Hand samples are extra and charged at the display discount.



# Sales Tools

---



## **Black Box Installer Toolkit**

Never be without a spare bracket. This comprehensive toolkit is meticulously curated to equip both novice and professional installers with everything needed for a flawless setup. This tools kit contains spare parts, spare brackets, cleaning supplies, calibration devices and more. The toolbox itself is a sturdy, compact case that organizes and protects your tools, while being portable enough for on-site installations. The box will be resupplied for free.



# Fabric Cards

### CS SERIES

PERFORMANCE SUNSCREEN

SG CS SERIES  
100% POLYESTER  
100% BLACK

Sun Glow Window Covering  
Products of Canada Ltd.

SG CS SERIES  
100% POLYESTER  
100% BLACK

TECHNICAL SPECIFICATIONS	SUN GLOW	SG CS SERIES
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG CS SERIES  
100% POLYESTER  
100% BLACK

### DX SERIES

100% POLYESTER / 100% POLYESTER

SG DX SERIES  
100% POLYESTER  
100% BLACK

Sun Glow Window Covering  
Products of Canada Ltd.

SG DX SERIES  
100% POLYESTER  
100% BLACK

TECHNICAL SPECIFICATIONS	SUN GLOW	SG DX SERIES
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG DX SERIES  
100% POLYESTER  
100% BLACK

### SG ECO LINEN

ELT-000 + 0%

SG ECO LINEN  
ELT-000 + 0%

Sun Glow Window Covering  
Products of Canada Ltd.

SG ECO LINEN  
ELT-000 + 0%

TECHNICAL SPECIFICATIONS	SUN GLOW	SG ECO LINEN
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG ECO LINEN  
ELT-000 + 0%

### SG ECO PRIVACY

EPT-01AC + 1%

SG ECO PRIVACY  
EPT-01AC + 1%

Sun Glow Window Covering  
Products of Canada Ltd.

SG ECO PRIVACY  
EPT-01AC + 1%

TECHNICAL SPECIFICATIONS	SUN GLOW	SG ECO PRIVACY
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG ECO PRIVACY  
EPT-01AC + 1%

### EZ 900

OPAL

SG EZ 900  
100% POLYESTER  
100% BLACK

Sun Glow Window Covering  
Products of Canada Ltd.

SG EZ 900  
100% POLYESTER  
100% BLACK

TECHNICAL SPECIFICATIONS	SUN GLOW	SG EZ 900
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG EZ 900  
100% POLYESTER  
100% BLACK

### SG VINYL MATTE & DUPLEX

VINYL MATTE + BLACKOUT / VINYL DUPLEX + BLACKOUT

SG VINYL MATTE & DUPLEX  
VINYL MATTE + BLACKOUT / VINYL DUPLEX + BLACKOUT

Sun Glow Window Covering  
Products of Canada Ltd.

SG VINYL MATTE & DUPLEX  
VINYL MATTE + BLACKOUT / VINYL DUPLEX + BLACKOUT

TECHNICAL SPECIFICATIONS	SUN GLOW	SG VINYL MATTE & DUPLEX
Composition	100% Polyester	100% Polyester
Openness Factor	100%	100%
Standard Width	144"	144"
Standard Length	120"	120"
Weight	0.0015 lb/sq yd	0.0015 lb/sq yd
Thickness	0.0015"	0.0015"
Flammability	Class 1 (UL 94)	Class 1 (UL 94)
Colorfastness	4 (AATCC 16)	4 (AATCC 16)
Color	Black	Black
Light Transmittance	0.00%	0.00%
Ultraviolet Transmittance	99.99%	99.99%
Acid Resistance	4 (ASTM D 197)	4 (ASTM D 197)
Alkali Resistance	4 (ASTM D 197)	4 (ASTM D 197)
UV Transmittance	0.00%	0.00%

SG VINYL MATTE & DUPLEX  
VINYL MATTE + BLACKOUT / VINYL DUPLEX + BLACKOUT