



Roller Shade

3" and 4" Fascia Installation Instructions



WARNING

STRANGULATION HAZARD — Young children can be strangled by cords. Immediately remove this product if a cord longer than 22 cm or a loop exceeding 44 cm around becomes accessible.




MISE EN GARDE

RISQUE D'ÉTRANGLEMENT — Les enfants en bas âge peuvent s'étrangler avec des cordes. Enlevez immédiatement ce produit si une corde mesurant plus de 22 cm devient accessible ou si le contour d'une boucle de plus de 44 cm devient accessible.

NOTE: Fabric wrapped valances must be handled with care

1

PREPARATION

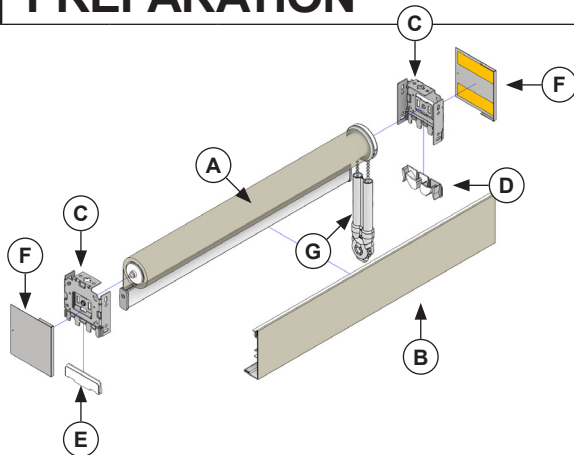

Component List

- A. Shade
- B. Fascia
- C. Mounting Bracket
- D. Chain Guard
- E. Flat Guard
- F. Bracket Cover (Optional)
- G. Safety Shie


Note: Before installation ensure Fascia (B) is cut to size for the application.

2

MOUNT THE BRACKETS


A 1/16" gap should only be there if you are using the bracket covers on a full or partial inside wall/ceiling mount. For lateral mounts the bracket covers must be modified for full or partial inside mounts.

WALL MOUNT





CEILING MOUNT

When mounting - Make sure that the screw is placed in one of the outside recesses and not the center of the middle hole.



LATERAL MOUNT

Screw in back - Cut end caps leaving enough distance from the back to the screws.




3

INSTALL THE SHADE

NOTE: For shades with Zero Gravity, please refer to Zero Gravity instructions on page 3 at this stage.


STEP 3A: INSTALL PIN END FIRST

Put the spring loaded Pin End into the hole in the bracket.



STEP 3B: INSTALL CLUTCH END


Keeping gentle pressure against the Pin End lift the clutch end up and align the two hooks on the clutch with the two slots in the bracket. The hooks should fall into place in the bracket, pull down gently to secure the blind into the bracket.




4

INSTALL THE GUARDS


(1) Insert the front chain into the outer channel of the chain guard. Then, insert the rear chain into the inner channel at the back of the guard.



(2) Then insert the chain guard into the mounting bracket until you hear an audible click.



(3) Insert the flat guard into the mounting bracket on the idle end until you hear an audible click.
(Note: For motorized and Zero Gravity shades, two flat guards are needed.)




5


INSTALL THE FASCIA

Regular Roll:

- (1) Hook the fascia on the top corner of the mounting brackets,
- (2) then swing the bottom in.




(3) You should hear a distinct click.




OR

Reverse Roll:

- (1) Push the fascia directly forward into the brackets to engage the clip in the center.




(2) You should hear a distinct click.



6

INSTALL THE SAFETY SHIELD

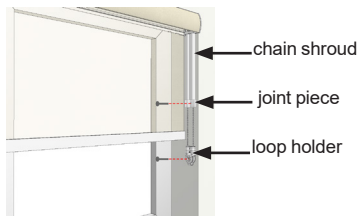

The loop holder and joint piece must be affixed to a wall or window frame.

Gently pull the loop holder taut and affix with a screw, then ensure that the chain shroud is raised before installing the joint piece with another screw.


7

INSTALL BRACKET COVERS

Bracket covers: Ensure bracket is flush with the fascia edge. Peel the yellow film from bracket cover to expose the adhesive. Firmly press the bracket cover against the mounting bracket.

Tape Application Techniques:

- Apply appropriate pressure for better adhesive contact and bonding strength.
- For optimum adhesion, the bonding surface must be clean, dry and uniform.
- Ideal application temperature is 21-38°C (70-100°F).

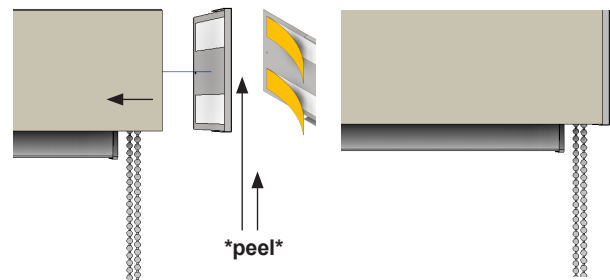



Zero Gravity - Fascia or Open Roll Instructions

These steps are not required for Zero Gravity in Curved Cassettes.
Skip these steps if using chain, Neo, or motorized control

If the Control End of the shade appears as shown here, proceed with **Steps 1, 2 & 3** before returning to Step 4 of the Open Roll Installation Instructions



If the Control End of the shade appears as shown here, proceed with **Steps 4, 5 & 6** before returning to Step 4 of the Open Roll Installation Instructions



1 PREPARING FOR INSTALLATION

NOTE: The blue shipping lock is used to lock the tension in place during shipping.

Hex Plunger
Remove shipping lock before installing




2 INSTALLING THE SYSTEM

(A) Insert the pin end of the blind into the bracket.

(B) Insert the hooked end into the other side bracket, and ensure the Zero Gravity head sits on the hooked teeth firmly. This should compress the hex plunger which releases the tension onto the shade.

(A)

Push



(B)

Push



3 TESTING THE SYSTEM

Always operate the shade from the center of the bottom bar. Ensure that the shade is balanced and does not want to roll up or down on its own. If it does, then the spring will require more or less tension to be perfectly balanced. If the shade requires more tension, turn the zero gravity head into the fabric, **ie opposite direction to the fall of the fabric.**

Insert for 5mm hex
(only for outside mount)



Adjusting Spanner

Zero Gravity - Fascia or Open Roll Instructions

These steps are not required for Zero Gravity in Curved Cassettes.
Skip these steps if using chain, Neo, or motorized control



WARNING

- Do not pull pin lock out until shade is installed or tension will be released.
- If tension has been released, see trouble shooting.

1


RUBBER BAND REMOVAL

Before installing the shade remove the rubber band holding the Pin Lock in place.

A



B

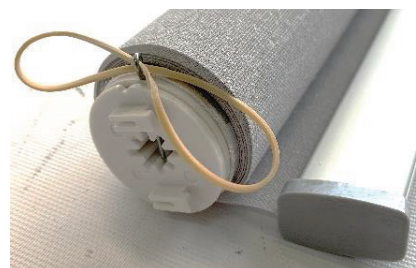

2

INSTALL SHADE AND REMOVE PIN LOCK


C: Install roller shade while keeping Pin Lock toward you and held in place.

D: After installation remove the pin lock

C



D



3

TESTING THE INSTALLED ROLLER SHADE


Installed roller shade must be operated smoothly by the centre of the bottom bar to avoid excessive telescoping



TROUBLE SHOOTING: ONLY REQUIRED IF TENSION IS RELEASED

If the tension is released or removed accidentally follow these instructions:

The tension can be put back in any Zero Gravity Mini by turning the clutch head in the opposite direction of the fabric approximately 1 – 2 full rotations. While holding tension, insert the Pin Lock into the hole of the clutch.



PROCEED WITH STEP 4 ON PAGE 2 WHEN FINISHED.