



Stealth Automation Remotes

1 channel - User Manual


01 Product Info



02 Buttons

a. Front

b. Back

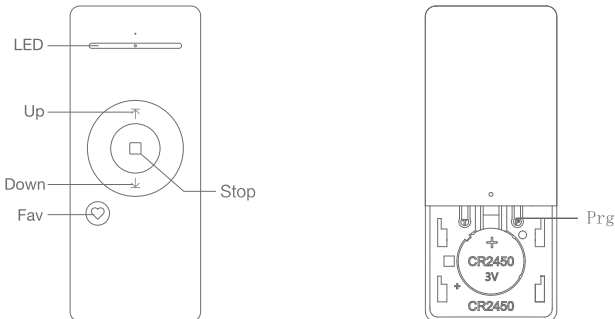

03 Models & Parameters (more info please refer to the nameplate)

Electrical Specification	Standard
Battery Type	CR2450*3V*1
Working Temperature	-10°C-50°C
Radio Frequency	433.92M±100KHz
Transmit Distance	>=30m indoor

04 Caution!



- 1.The remote controller should not be exposed to moisture or impact, so as not to affect its life.
- 2.During use, when the remote control distance is significantly shorter or less sensitive, please check whether the battery needs to be replaced.
- 3.When the battery voltage is too low, the orange LED will flicker during operation.
- 4.Please properly dispose of used batteries according to the local garbage classification and recycling policy.

05 Instructions

a.Prohibit Dual-key Operation

- ① Prg for 10s
- ② Repeat the above, dual-key operation activated

Note: When dual-key operation prohibited, these programming setting functions are not allowed.

b. For other operations, please refer to the motor operation instruction